



AC FAN SK127AP 127 X 127 X 38.5mm(5") 125 CFM

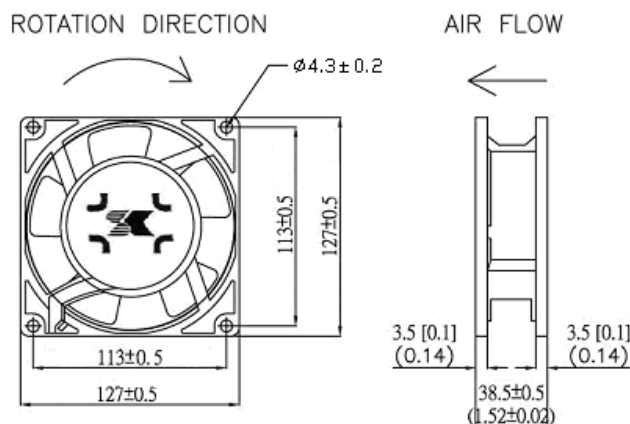

- Motor** Shaded pole, impedance protected
- Housing / Frame** Die-cast aluminum, Painted black (AP) or Plated (AN)
- Impeller** Glass reinforced thermoplastic, UL 94V-0
- Bearing Type** Two-ball or sleeve available
- Connecting** T-Terminal push-on type or W-Lead wire type
- Dielectric Strength** 1 min. at 1,500VAC, 50/60Hz
- Operating Temp** Ball bearing -20°C~+70°C
Sleeve bearing -10°C~+55°C
- Life Expectancy** Ball bearing 60,000 hours at 60°C
Sleeve bearing 20,000 hours at 45°C
- Net Weight** 590gm (1.3 pounds)
- Safety Approvals** UL, CUL, TUV, CE, RoHS

SK127 P-Q Curves

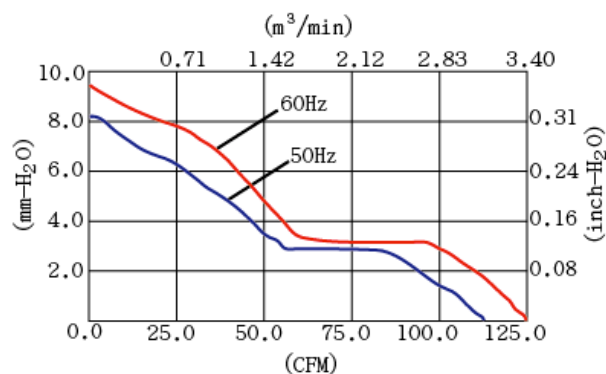

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m ³ /min	CFM	mm-H ₂ O	inch-H ₂ O	
SK127AP-11-1	115 (100V~120V)	50/60	0.218/0.179	18.4/14.6	2700/3000	3.2/3.6	113/125	8.1/9.4	0.32/0.37	50/53
SK127AP-22-1	230 (200V~230V)	50/60	0.106/0.086	19.3/15.1	2700/3000	3.2/3.6	113/125	8.1/9.4	0.32/0.37	50/55