



AC FAN SK162AP $\varnothing 172 \times 150 \times 51 \text{mm} (6") 230\sim 113 \text{CFM}$

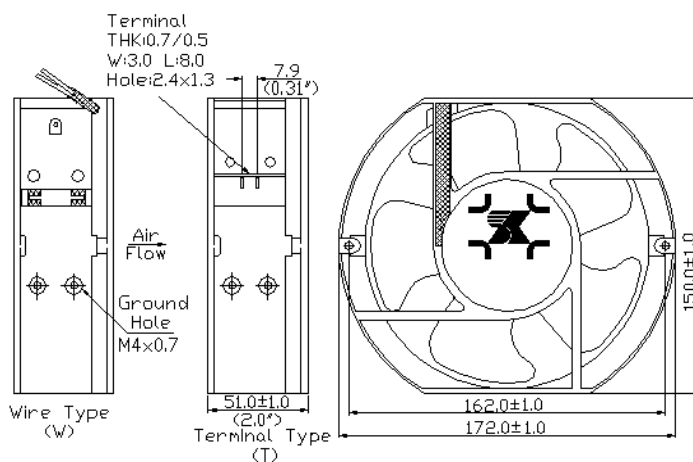

- Motor** Shaded pole, impedance protected or thermally protected
- Housing / Frame** Die-cast aluminum, Painted black (AP) or Plated (AN)
- Impeller** Glass reinforced thermoplastic, UL 94V-0
- Bearing Type** Two-ball bearing
- Connecting** T-Terminal push-on type or W-Lead wire type
- Dielectric Strength** 1 min. at 1,500VAC, 50/60Hz
- Operating Temp** Ambient $-20^{\circ}\text{C} \sim +55^{\circ}\text{C}$
- Life Expectancy** 50,000 hours at 25°C
30,000 hours at 65°C
- Net Weight** 1,050gm(2.31 pounds)
- Safety Approvals** UL, CUL, TUV, CE, RoHS

SK162 P-Q Curves

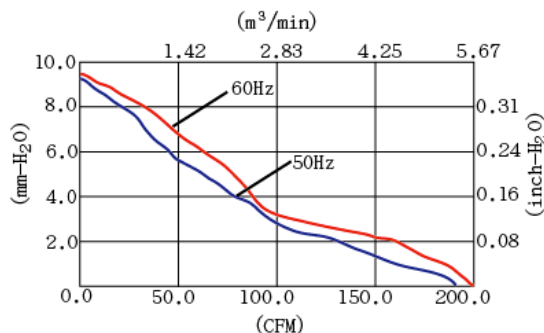

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m³/min	CFM	mm-H ₂ O	inch-H ₂ O	
SK162AP-11-1	115 (100V~120V)	50/60	0.56/0.50	38/36	2600/2850	5.4/6.5	190/200	16/20	0.63/0.79	57
SK162AP-11-2	115 (100V~120V)	50/60	0.28/0.27	25/23	2400/2000	4.5/4.2	169/156	13/14	0.51/0.55	46
SK162AP-11-3	115 (100V~120V)	50/60	0.21/0.19	22/20	2170/1300	3.2/2.9	150/114	10/8	0.40/0.31	37
SK162AP-22-1	230 (200V~230V)	50/60	0.30/0.25	38/36	2600/2850	5.4/6.5	190/200	16/20	0.63/0.79	57
SK162AP-22-2	230 (200V~230V)	50/60	0.17/0.16	25/23	2400/2200	4.5/4.2	169/156	13/14	0.51/0.55	46
SK162AP-22-3	230 (200V~230V)	50/60	0.13/0.12	22/20	2170/1300	3.2/2.9	150/114	10/8	0.40/0.31	37