



AC FAN SK280AP 280 X 89mm (11") 1480~680 CFM

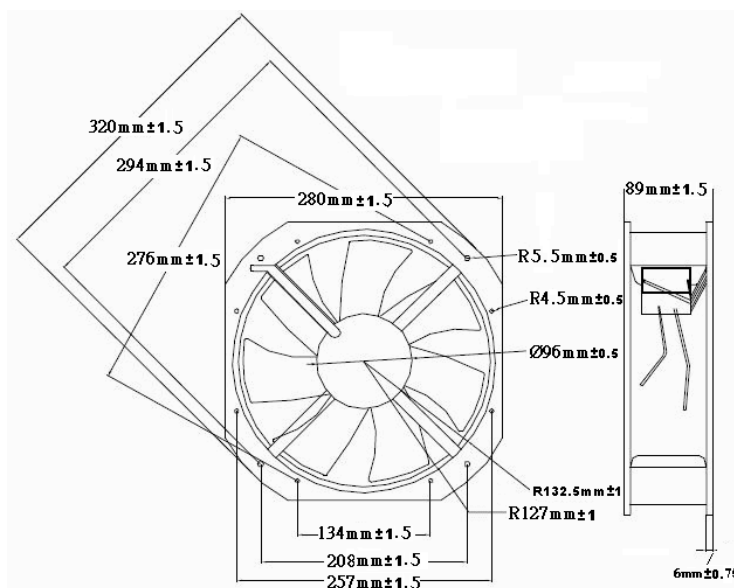

- Motor** Single phase induction capacitor motor, thermally protected
- Housing / Frame** Die-cast aluminum, Painted black (AP) or Plated (AN)
- Impeller** Glass reinforced thermoplastic, UL 94V-0
- Bearing Type** Two-ball Bearing
- Connecting** T-Terminal push-on type or W-Lead wire type
- Dielectric Strength** 1 min. at 1,500VAC, 50/60Hz
- Operating Temp** Recommended ambient range -20°C ~ +80°C
- Life Expectancy** 60,000 hours at 25°C
40,000 hours at 65°C
- Net Weight** 4.24 kg
- Safety Approvals** UL, CUL, TUV, CE, RoHS

SK280 P-Q Curves

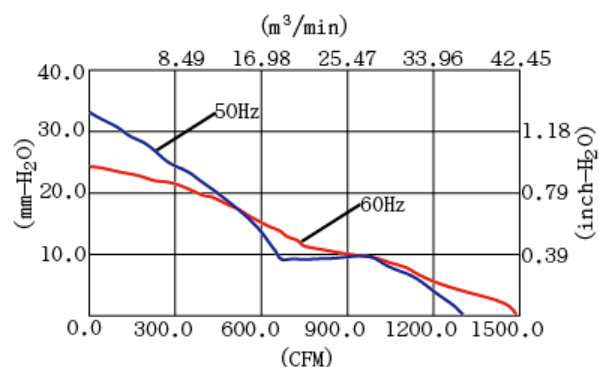

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m ³ /min	CFM	mm-H ₂ O	inch-H ₂ O	
SK280AP-11-1	115 (100V~120V)	50/60	1.70/2.84	185/300	2800/3200	39.1/41.9	1380/1480	33.0/24.0	1.30/0.94	67/69
SK280AP-11-2	115 (100V~120V)	50/60	0.82/0.67	61/60	1500/1700	19.2/22.9	680/810	9.8/12.8	0.39/0.50	56/59
SK280AP-22-1	230 (200V~240V)	50/60	0.80/1.29	185/290	2800/3200	39.1/41.9	1380/1480	33.0/24.0	1.30/0.94	73/75
SK280AP-22-2	230 (200V~240V)	50/60	0.42/0.35	62/65	1500/1700	19.2/22.9	680/810	9.8/12.8	0.39/0.50	56/59