



AC FAN SK838AP 80 X 80 X 38mm(3") 26~17 CFM

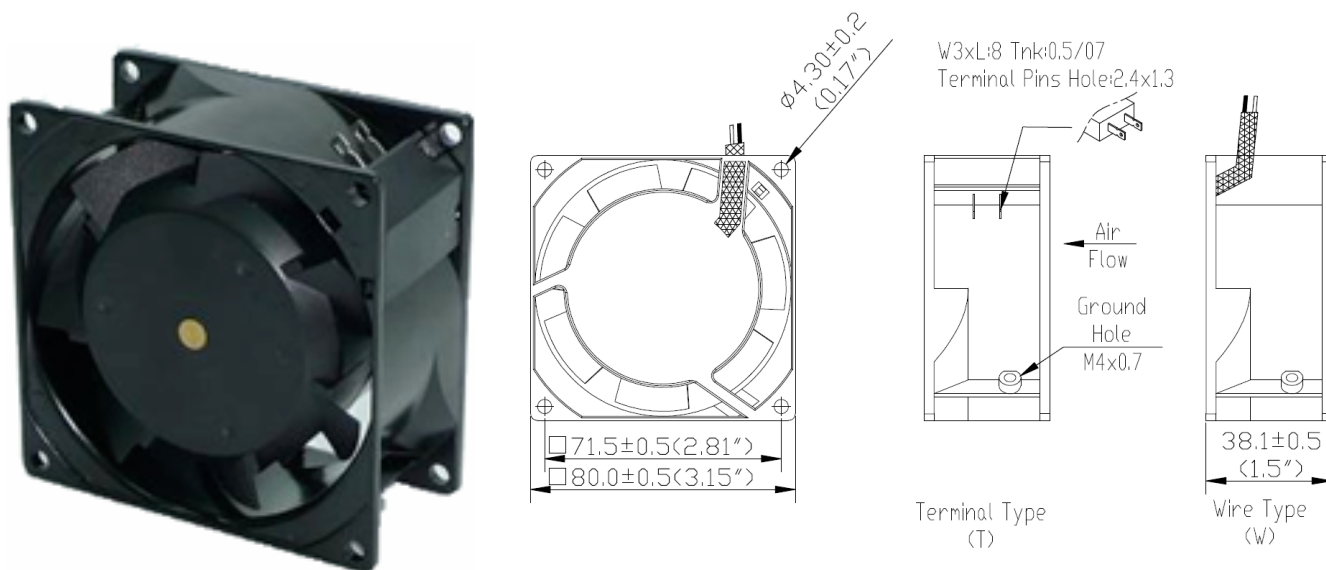

馬達 Motor	Shaded pole, impedance protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP)
風葉 Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承 Bearing Type	Two-ball or sleeve available
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Ball bearing -20°C~+70°C Sleeve bearing -10°C~+55°C
壽命 Life Expectancy	Ball bearing 60,000 hours at 60°C Sleeve bearing 20,000 hours at 45°C
淨重 Net Weight	370gm(0.82 pound)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK838 P-Q Curves

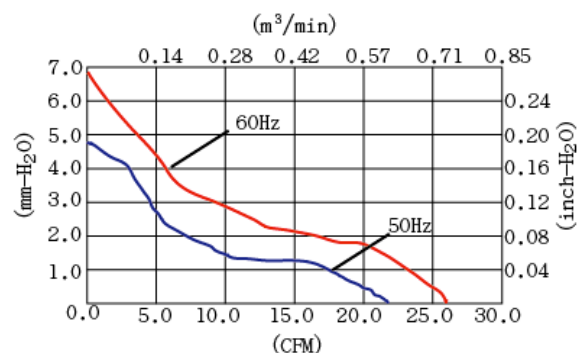

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM		最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O		噪音 Noise Level (dB)
SK838AP-11-1	110 (100V~120V)	50/60	0.12/0.10	14/12	2700/3250	0.62/0.74	22/26	4.8/6.8	0.19/0.27	30/35
SK838AP-11-2	110 (100V~120V)	50/60	0.07/0.06	11/9	2250/2550	0.51/0.57	18/20	3.2/3.8	0.13/0.15	26/29
SK838AP-22-1	220 (200V~240V)	50/60	0.06/0.05	14/12	2700/3250	0.62/0.74	22/26	4.8/6.8	0.19/0.27	30/37
SK838AP-22-2	220 (200V~240V)	50/60	0.05/0.04	11/9	2450/2700	0.51/0.57	18/20	3.2/3.8	0.13/0.15	26/29
SK838AP-22-3	220 (200V~240V)	50/60	0.04/0.03	7/5	2200/2200	0.48/0.51	17/18	3.0/2.5	0.12/0.10	25/26