



AC FAN SK92AP 92 X 92 X 26.5mm(3.5") 34~18 CFM

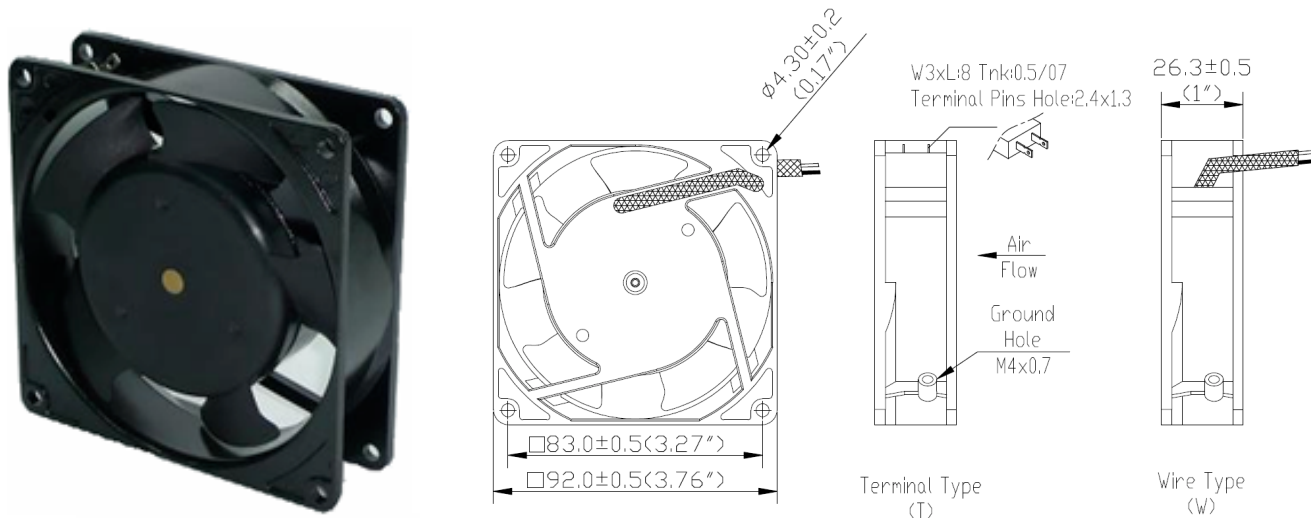

馬達 Motor	Shaded pole, impedance protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP)
風葉 Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承 Bearing Type	Two-ball or sleeve available
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Ball bearing -20°C~+70°C Sleeve bearing -10°C~+55°C
壽命 Life Expectancy	Ball bearing 60,000 hours at 60°C Sleeve bearing 20,000 hours at 45°C
淨重 Net Weight	290gm(0.64 pound)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK92 P-Q Curves

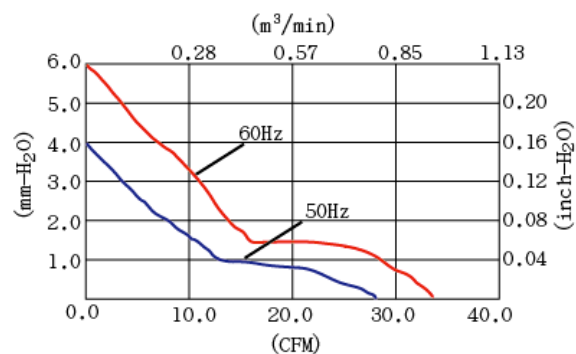

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM	最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O	噪音 Noise Level (dB)
SK92AP-11-1	110 (100V~120V)	50/60	0.18/0.16	15/13	2400/3000	0.79/0.96 28/34	4.0/6.0 0.16/0.24	31/39
SK92AP-11-2	110 (100V~120V)	50/60	0.09/0.08	10/9	2100/2300	0.65/0.76 23/27	2.7/3.1 0.11/0.12	28/31
SK92AP-11-3	110 (100V~120V)	50/60	0.07/0.06	7/6	1700/1750	0.51/0.54 18/19	1.4/1.5 0.05/0.06	26/27
SK92AP-22-1	220 (200V~240V)	50/60	0.08/0.07	15/13	2400/2900	0.79/0.96 28/34	4.0/6.0 0.16/0.24	31/38
SK92AP-22-2	220 (200V~240V)	50/60	0.06/0.05	10/9	2100/2350	0.65/0.76 23/27	2.7/3.1 0.11/0.12	28/32
SK92AP-22-3	220 (200V~240V)	50/60	0.05/0.04	7/6	1650/1850	0.51/0.54 18/19	1.4/1.5 0.05/0.06	21/23