



AC FAN SK165AP Ø172 X 150 X 55mm(6") 166~180 CFM

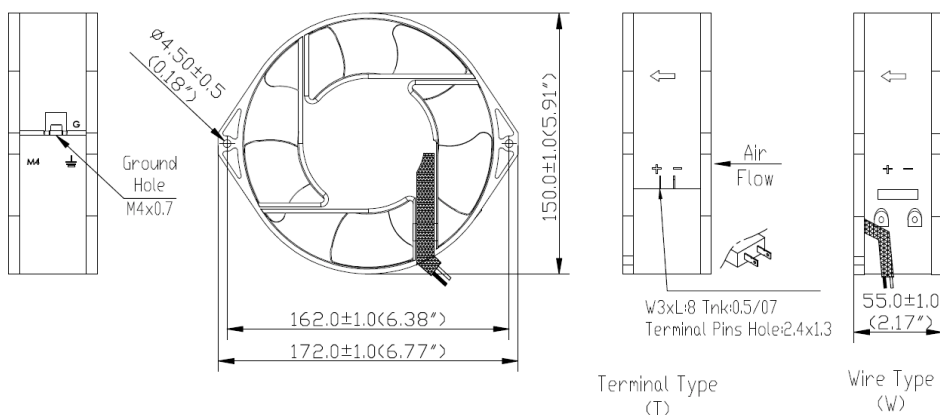

馬達 Motor	Shaded pole, impedance protected or thermally protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承 Bearing Type	Two-ball bearing
接電方式 Connecting	W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Ambient -20°C~+55°C
壽命 Life Expectancy	50,000 hours at 25°C 30,000 hours at 65°C
淨重 Net Weight	904gm(1.99 pounds)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK165 P-Q Curves

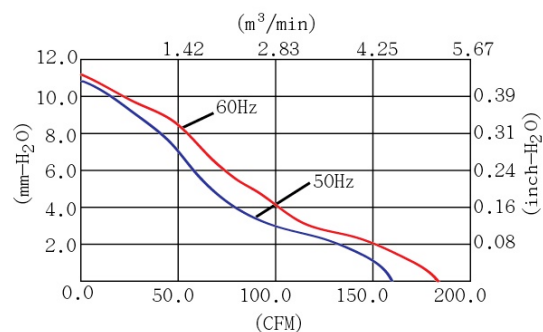

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM	最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O	噪音 Noise Level (dB)
SK165AP-11-1	110 (100V~120V)	50/60	0.55/0.47	48.3/39.0	2600/2850	4.7/5.1 166/180	10.8/11 0.42/0.43	50/53
SK165AP-22-1	220 (200V~230V)	50/60	0.28/0.23	50.2/40.8	2600/2850	4.7/5.1 166/180	10.8/11 0.42/0.43	50/55