
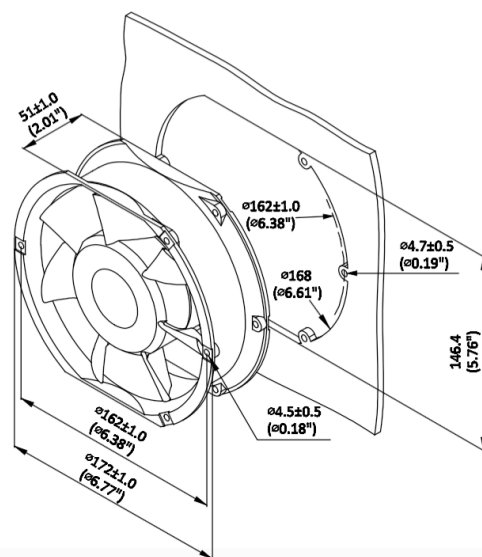


AC FAN SK170AP

Ø172 X 150 X 51mm(6") 310~275 CFM



馬達 Motor

Single phase induction capacitor motor, thermally protected

外殼 Housing / Frame

Die-cast aluminum, Painted black (AP) or Plated (AN)

風葉 Impeller

PBT thermoplastic + glass fiber, UL 94V-0

軸承 Bearing Type

Two-ball bearing

接電方式 Connecting

T-Terminal push-on type or W-Lead wire type

耐壓 Dielectric Strength

1 min. at 1,500VAC, 50/60Hz

溫度範圍 Operating Temp

Ambient -20°C~+70°C

壽命 Life Expectancy

60,000 hours at 25°C
40,000 hours at 65°C


淨重 Net Weight

1,013gm (2.23 pounds)

檢定 Safety Approvals

UL, CUL, TUV, CE, RoHS

SK170 P-Q Curves

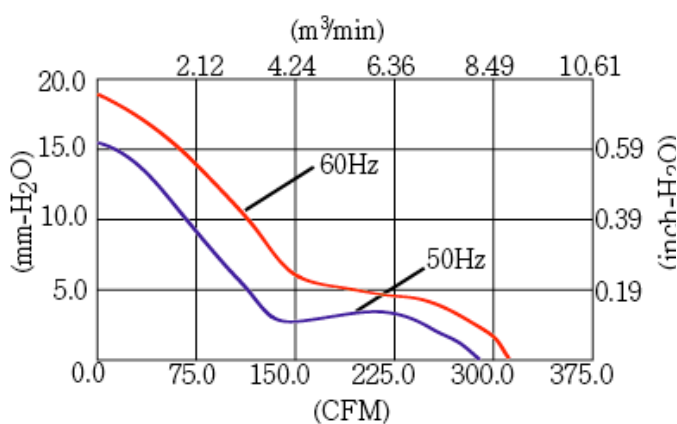

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow		最大風壓 Max. Static Pressure		噪音 Noise Level (dB)
						m³/min	CFM	mm-H ₂ O	inch-H ₂ O	
SK170AP-11-1	110 (100V~120V)	50/60	0.52/0.52	59/56	2675/3046	7.7/8.7	275/310	15/19.1	0.59/0.75	56/59
SK170AP-22-1	220 (200V~240V)	50/60	0.26/0.26	59/56	2609/2960	7.7/8.7	275/310	15/19.1	0.59/0.75	56/59