

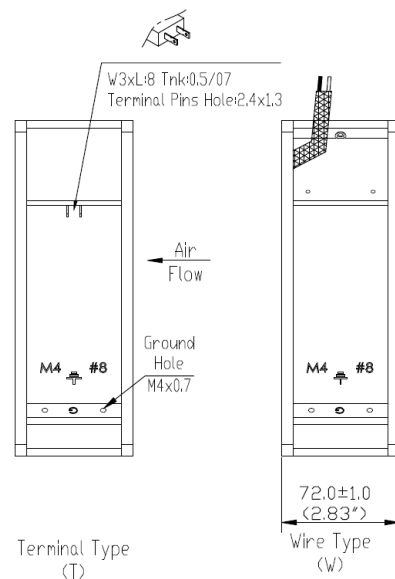


AC FAN SK205AP 205 X 205 X 72mm(8")710~620 CFM

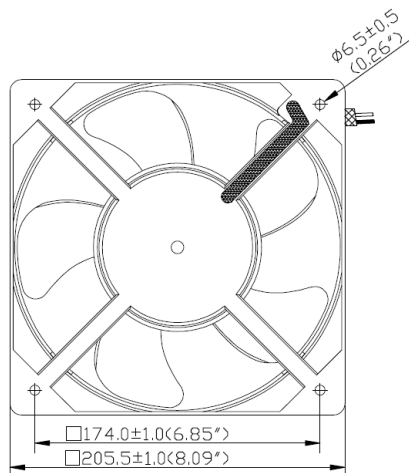

馬達 Motor	Single phase induction capacitor motor, thermally protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	PC thermoplastic + glass fiber, UL 94V-0
軸承 Bearing Type	Two-ball bearing
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Recommended ambient range -20°C~+70°C
壽命 Life Expectancy	60,000 hours at 25°C 40,000 hours at 65°C
淨重 Net Weight	2.1 kg (4.6 pounds)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK205 P-Q Curves

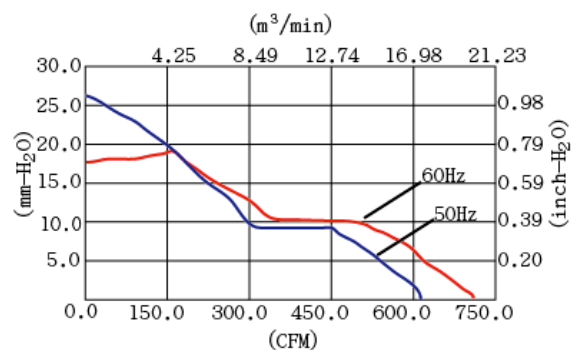

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow		最大風壓 Max. Static Pressure		噪音 Noise Level (dB)
						m ³ /min	CFM	mm-H ₂ O	inch-H ₂ O	
SK205AP-11-1	110 (100V~120V)	50/60	0.60/1.00	65/102	2850/3250	17.5/20.1	620/710	26.4/17.4	1.04/0.69	67/71
SK205AP-22-1	220 (200V~240V)	50/60	0.30/0.49	65/102	2850/3250	17.5/20.1	620/710	26.4/17.4	1.04/0.69	68/71