



AC FAN SK225AP

225 X 225 X 80mm(9")750~630 CFM

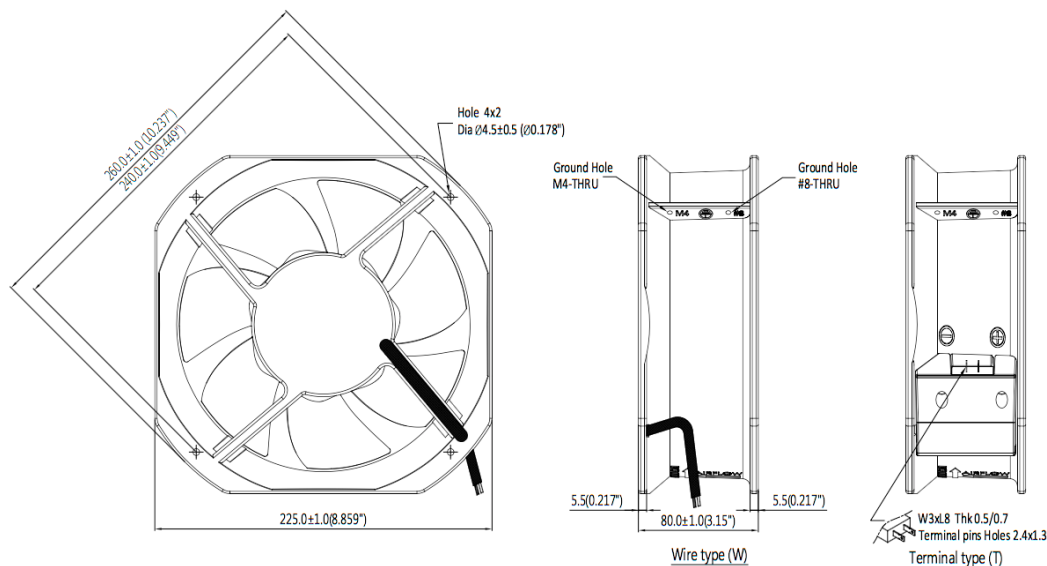

馬達 Motor	Single phase induction capacitor motor, thermally protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	PC thermoplastic + glass fiber, UL 94V-0
軸承 Bearing Type	Two-ball bearing
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Recommended ambient range -20°C~+70°C
壽命 Life Expectancy	60,000 hours at 25°C 40,000 hours at 65°C
淨重 Net Weight	2.88 kg (6.35 pound)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK225 P-Q Curves

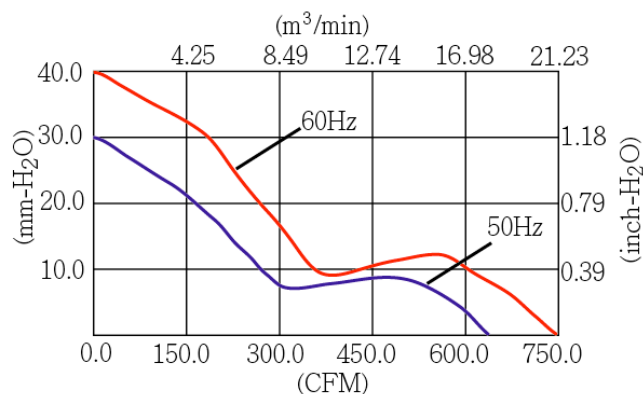

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m ³ /min CFM	最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O	噪音 Noise Level (dB)
SK225AP-11-1	110 (110V~120V)	50/60	0.97/0.97	77/105	2920/3450	17.8/21.2 630/750	30/40 1.18/1.57	63/67
SK225AP-22-1	220 (220V~240V)	50/60	0.44/0.44	87/105	2920/3450	17.8/21.2 630/750	30/40 1.18/1.57	63/67