


AC FAN SK938AP

92X92X38mm(3.62"×1.5") 33~48 CFM




馬達	Motor	Shaded pole, impedance protected
外殼	Housing / Frame	Die-cast aluminum, Painted black (AP)
風葉	Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承	Bearing Type	Two-ball or sleeve available
接電方式	Connection	T-Terminal push-on type or W-Lead wire type
耐壓	Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍	Operating Temp	Ball bearing -20°C~+70°C Sleeve bearing -10°C~+55°C
壽命	Life Expectancy	Ball bearing 60,000 hours at 40°C Sleeve bearing 30,000 hours at 40°C
淨重	Net Weight	450 gm (0.99 pound)
認證	Safety Approvals	UL, CUL, TUV, CE, RoHS

SK938 P-Q Curves

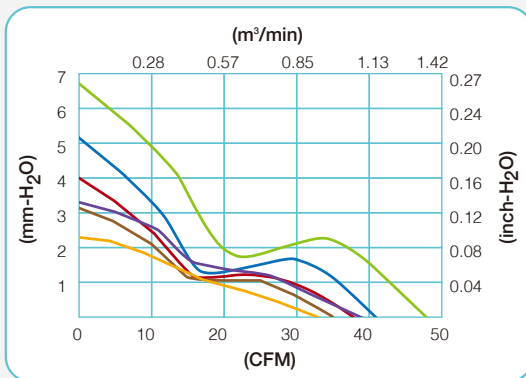

— -1 50Hz — -2 50Hz — -3 50Hz
— -1 60Hz — -2 60Hz — -3 60Hz

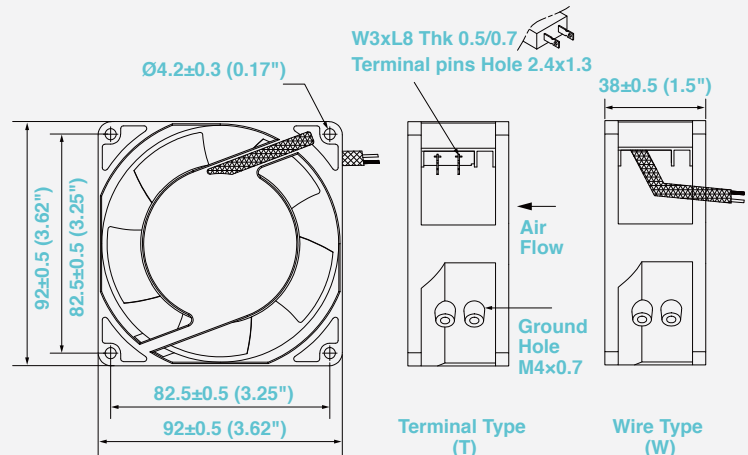

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m³/min CFM	Max. Static Pressure mm-H ₂ O inch-H ₂ O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風壓	噪音
SK938AP-11-1	110 (100V~120V)	50/60	0.12/0.11	14/12	2700/3200	1.16/1.36 41/48	5.1/6.7 0.20/0.26	34/39
SK938AP-11-2	110 (100V~120V)	50/60	0.07/0.06	11/9	2400/2550	1.08/1.10 38/39	4.0/3.3 0.16/0.13	32/35
SK938AP-11-3	110 (100V~120V)	50/60	0.05/0.04	7/5	2200/1950	0.99/0.93 35/33	3.2/2.3 0.13/0.09	30/27
SK938AP-22-1	220 (200V~230V)	50/60	0.06/0.05	14/12	2600/3050	1.16/1.36 41/48	5.1/6.7 0.20/0.26	33/38
SK938AP-22-2	220 (200V~230V)	50/60	0.05/0.04	11/9	2400/2550	1.08/1.10 38/39	4.0/3.3 0.16/0.13	32/35

Customised Item : Frameless, Double Voltage, FG,RD

