

AC FAN SK162AP

172X150X51mm(6.77"×5.91"×2.01") 100~190 CFM



馬達 Motor

Shaded pole, impedance protected or thermally protected

外殼 Housing / Frame

Die-cast aluminum, Painted black (AP) or Plated (AN)

風葉 Impeller

PBT thermoplastic + glass fiber, UL 94V-0

軸承 Bearing Type

Two-ball bearing

接電方式 Connection

T-Terminal push-on type or W-Lead wire type

耐壓 Dielectric Strength

1 min. at 1,500VAC, 50/60Hz

溫度範圍 Operating Temp

Ambient -20°C~+55°C

壽命 Life Expectancy

60,000 hours at 40°C


淨重 Net Weight

1,050 gm (2.31 pounds)



認證 Safety Approvals

UL, CUL, TUV, CE, RoHS

SK162 P-Q Curves

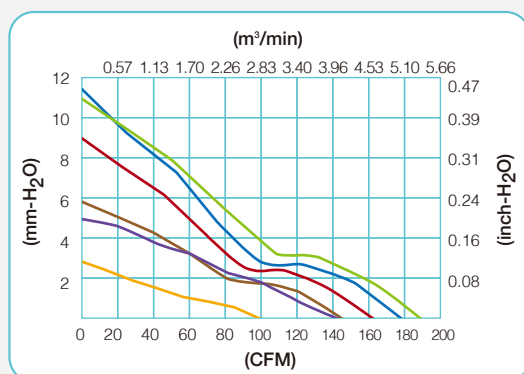

— -1 50Hz — -2 50Hz — -3 50Hz
— -1 60Hz — -2 60Hz — -3 60Hz

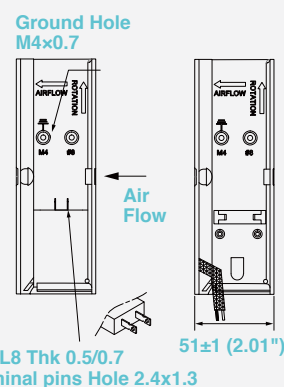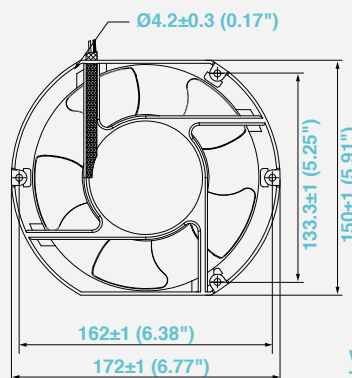

Terminal Type (T) Wire Type (W)

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m ³ /min CFM	Max. Static Pressure mm-H ₂ O inch-H ₂ O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風壓	噪音
SK162AP-11-1	110 (100V~120V)	50/60	0.56/0.50	38/36	2600/2850	5.0/5.4 178/190	11.4/11.0 0.45/0.43	50/53
SK162AP-11-2	110 (100V~120V)	50/60	0.28/0.27	25/23	2400/2000	4.6/4.0 162/143	9.0/5.0 0.35/0.20	40/42
SK162AP-11-3	110 (100V~120V)	50/60	0.21/0.19	22/20	2170/1300	4.1/2.8 145/100	5.8/2.8 0.23/0.11	32/34
SK162AP-22-1	220 (200V~230V)	50/60	0.30/0.25	38/36	2600/2850	5.0/5.4 178/190	11.4/11.0 0.45/0.43	50/53
SK162AP-22-2	220 (200V~230V)	50/60	0.17/0.16	25/23	2400/2200	4.6/4.0 162/143	9.0/5.0 0.35/0.20	40/42
SK162AP-22-3	220 (200V~230V)	50/60	0.13/0.12	22/20	2170/1300	4.1/2.8 145/100	5.8/2.8 0.23/0.11	32/34

Customised Item : Frameless, Double Voltage

