



AC FAN SK825AP

80X80X25mm(3.15"x1.0") 11~19 CFM



馬達	Motor	Shaded pole, impedance protected
外殼	Housing / Frame	Die-cast aluminum, Painted black (AP)
風葉	Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承	Bearing Type	Two-ball or sleeve available
接電方式	Connection	T-Terminal push-on type or W-Lead wire type
耐壓	Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍	Operating Temp	Ball bearing -20°C~+70°C Sleeve bearing -10°C~+55°C
壽命	Life Expectancy	Ball bearing 60,000 hours at 40°C Sleeve bearing 30,000 hours at 40°C
淨重	Net Weight	260 gm (0.57 pound)
認證	Safety Approvals	UL, CUL, TUV, CE, RoHS

SK825 P-Q Curves

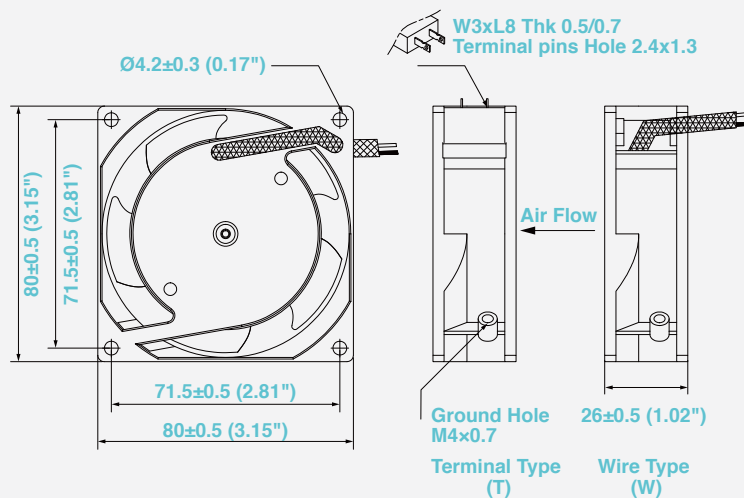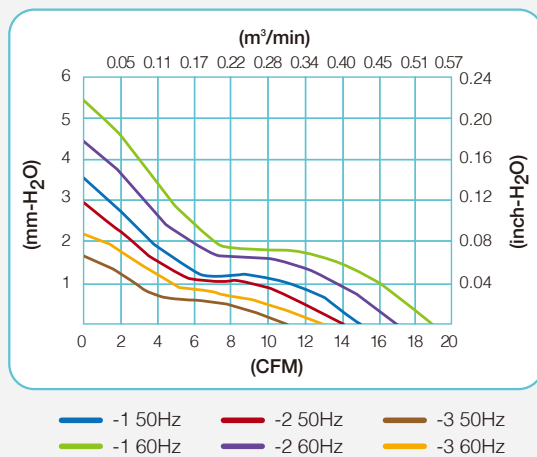

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m³/min CFM	Max. Static Pressure mm-H ₂ O inch-H ₂ O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風壓	噪音
SK825AP-11-1	110 (100V~120V)	50/60	0.17/0.15	15/13	2550/3200	0.42/0.54 15/19	3.6/5.5 0.14/0.22	29/35
SK825AP-11-2	110 (100V~120V)	50/60	0.09/0.08	10/9	2100/2550	0.34/0.42 14/17	2.9/4.2 0.11/0.17	27/29
SK825AP-11-3	110 (100V~120V)	50/60	0.07/0.06	7/6	1750/1850	0.31/0.36 11/13	1.7/2.2 0.06/0.08	23/24
SK825AP-22-1	220 (200V~230V)	50/60	0.08/0.07	15/13	2550/3200	0.42/0.54 15/19	3.6/5.5 0.14/0.22	29/35
SK825AP-22-2	220 (200V~230V)	50/60	0.06/0.05	10/9	2400/2950	0.40/0.51 14/17	2.9/4.2 0.11/0.17	28/32

Customised Item : Frameless, Double Voltage

