


AC FAN SK125AP

120X120X25mm(4.72"x1") 38~66 CFM




馬達	Motor	Shaded pole, impedance protected
外殼	Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉	Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承	Bearing Type	Two-ball or sleeve available
接電方式	Connection	T-Terminal push-on type or W-Lead wire type
耐壓	Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍	Operating Temp	Ball bearing -20°C~+70°C Sleeve bearing -10°C~+55°C
壽命	Life Expectancy	Ball bearing 60,000 hours at 40°C Sleeve bearing 30,000 hours at 40°C
淨重	Net Weight	390 gm (0.86 pound)
認證	Safety Approvals	UL, CUL, TUV, CE, RoHS

SK125 P-Q Curves

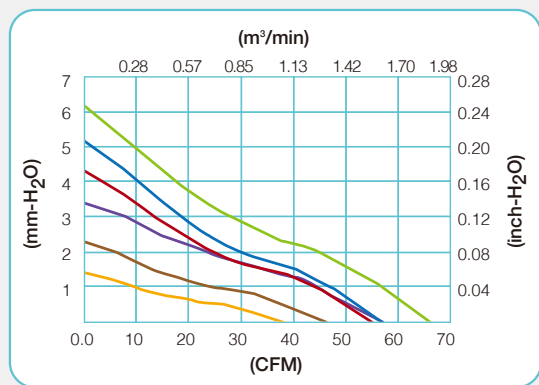

— -1 50Hz — -2 50Hz — -3 50Hz
— -1 60Hz — -2 60Hz — -3 60Hz

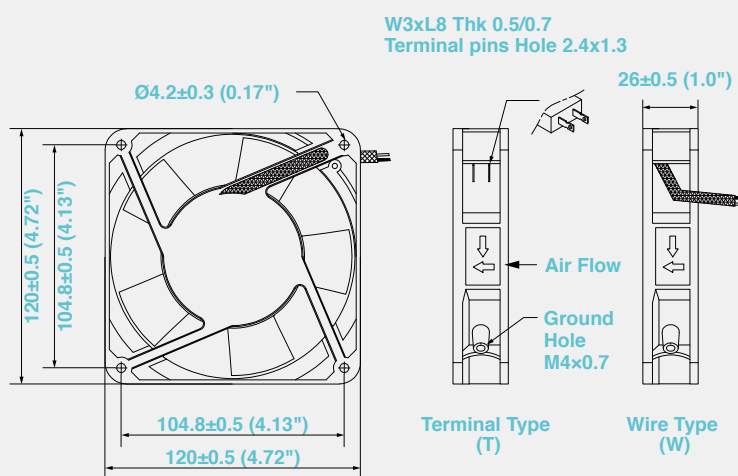

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m³/min	Max. Air Flow CFM	Max. Static Pressure mm-H₂O	Max. Static Pressure inch-H₂O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風量	最大風壓	最大風壓	噪音
SK125AP-11-1	110 (100V~120V)	50/60	0.25/0.20	17/15	2550/3000	1.61/1.87	57/66	5.2/6.2	0.20/0.24	44/48
SK125AP-11-2	110 (100V~120V)	50/60	0.09/0.08	12/10	2400/2600	1.56/1.61	55/57	4.3/3.4	0.17/0.13	42/45
SK125AP-11-3	110 (100V~120V)	50/60	0.06/0.05	8/6	2100/1900	1.30/1.08	46/38	2.3/1.4	0.09/0.06	39/35
SK125AP-22-1	220 (200V~230V)	50/60	0.09/0.07	17/15	2550/3000	1.61/1.87	57/66	5.2/6.2	0.20/0.24	44/48
SK125AP-22-2	220 (200V~230V)	50/60	0.06/0.05	12/10	2400/2600	1.56/1.61	55/57	4.3/3.4	0.17/0.13	42/45
SK125AP-22-3	220 (200V~230V)	50/60	0.05/0.04	8/6	2000/1750	1.30/1.08	46/38	2.3/1.4	0.09/0.06	36/31

Customised Item : Frameless, Double Voltage

