



AC FAN SK127AP

127X127X38mm(5"×1.5") 102~116 CFM



馬達	Motor	Shaded pole, impedance protected
外殼	Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉	Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承	Bearing Type	Two-ball or sleeve available
接電方式	Connection	T-Terminal push-on type or W-Lead wire type
耐壓	Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍	Operating Temp	Ball bearing -20°C~+70°C Sleeve bearing -10°C~+55°C
壽命	Life Expectancy	Ball bearing 60,000 hours at 40°C Sleeve bearing 30,000 hours at 40°C
淨重	Net Weight	590 gm (1.3 pounds)
認證	Safety Approvals	UL, CUL, TUV, CE, RoHS

SK127 P-Q Curves

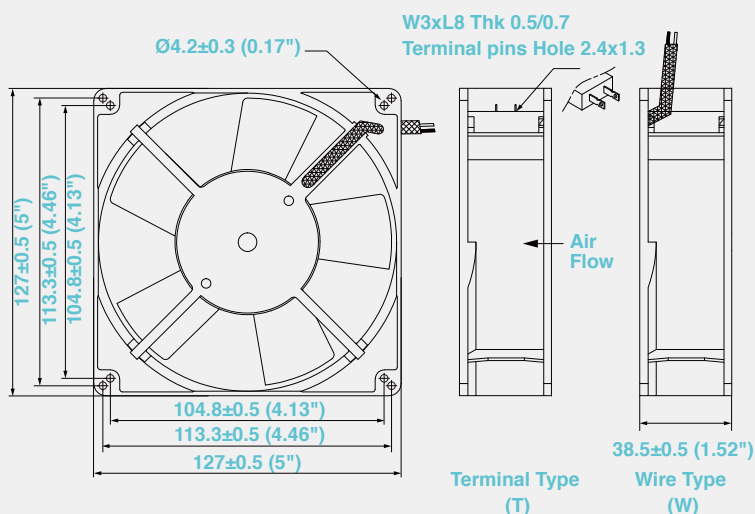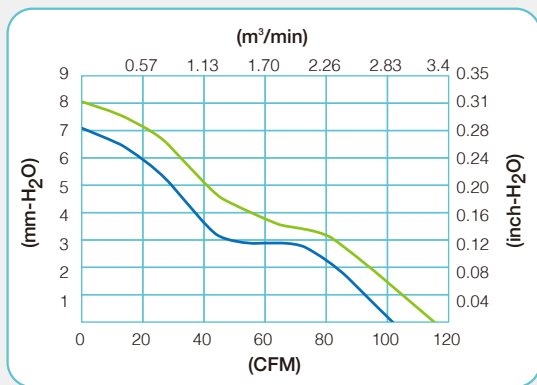

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m³/min CFM	Max. Static Pressure mm-H ₂ O inch-H ₂ O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風壓	噪音
SK127AP-11-1	100 (100V~120V)	50/60	0.218/0.179	18.4/14.6	2700/3000	2.9/3.3 102/116	7.1/8.1 0.28/0.32	50/55
SK127AP-22-1	200 (220V~230V)	50/60	0.106/0.086	19.3/15.1	2700/3000	2.9/3.3 102/116	7.1/8.1 0.28/0.32	50/55

Customised Item : Frameless, Double Voltage, FG,RD

