

AC FAN SK172AP

172X150X51mm(6.77"x5.91"x2.01") 94~208 CFM



馬達 Motor

Single phase induction capacitor motor, thermally protected or impedance protected

外殼 Housing / Frame

Die-cast aluminum, Painted black (AP) or Plated (AN)

風葉 Impeller

PBT thermoplastic + glass fiber, UL 94V-0

軸承 Bearing Type

Two-ball bearing

接電方式 Connection

T-Terminal push-on type or W-Lead wire type

耐壓 Dielectric Strength

1 min. at 1,500VAC, 50/60Hz

溫度範圍 Operating Temp

Ambient -20°C~+80°C

壽命 Life Expectancy

60,000 hours at 40°C


淨重 Net Weight

1,050 gm (2.31 pounds)


認證 Safety Approvals

UL, CUL, TUV, CE, RoHS

SK172 P-Q Curves

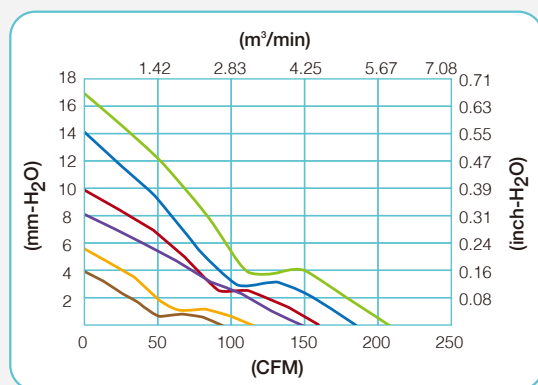

— -1 50Hz — -2 50Hz — -3 50Hz
— -1 60Hz — -2 60Hz — -3 60Hz

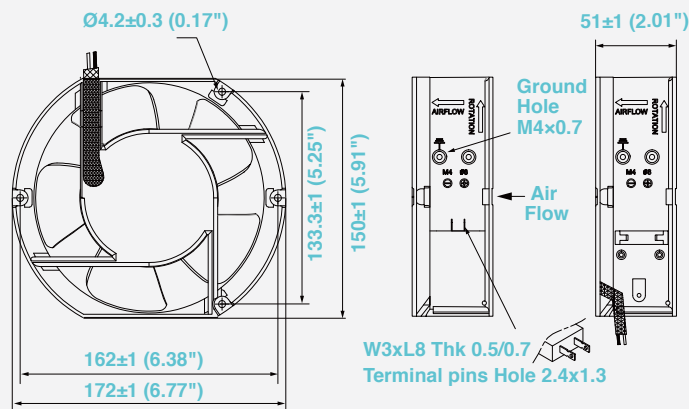

Terminal Type (T) Wire Type (W)

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m ³ /min CFM	Max. Static Pressure mm-H ₂ O inch-H ₂ O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風壓	噪音
SK172AP-11-1	110 (100V~120V)	50/60	0.24/0.25	24/28	2800/3200	5.2/5.9 185/208	14.2/17.0 0.56/0.67	56/60
SK172AP-11-2	110 (100V~120V)	50/60	0.17/0.21	20/23	2550/2400	4.6/4.2 161/149	9.8/8.0 0.39/0.31	53/50
SK172AP-11-3	110 (100V~120V)	50/60	0.16/0.20	16/18	1450/1750	2.6/3.3 94/116	3.9/5.6 0.15/0.22	36/42
SK172AP-22-1	220 (200V~240V)	50/60	0.12/0.16	24/28	2800/3200	5.2/5.9 185/208	14.2/17.0 0.56/0.67	56/60
SK172AP-22-2	220 (200V~240V)	50/60	0.10/0.12	20/23	2550/2300	4.6/4.2 161/149	9.8/8.0 0.39/0.31	53/50
SK172AP-22-3	220 (200V~240V)	50/60	0.09/0.016	16/18	1450/1750	2.6/3.3 94/116	3.9/5.6 0.15/0.22	36/42

Customised Item : Frameless, Double Voltage, FG,RD

